


High Pressure Cleaner

HSC840-INOX 24kW

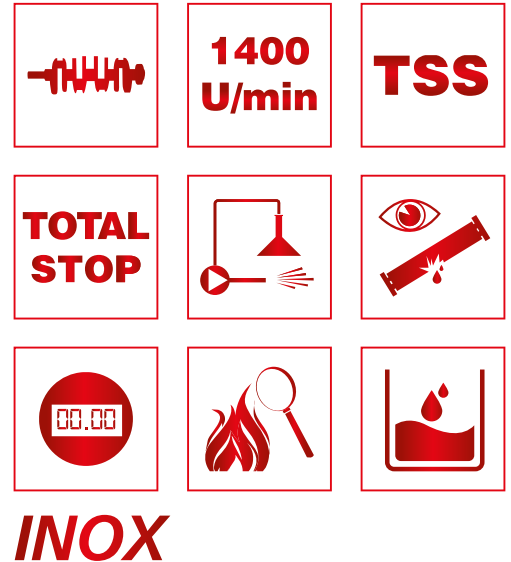

Type		HSC840-INOX 24kW
Voltage	3/N/PE/AC/50Hz/400V	<ul style="list-style-type: none"> Stainless steel (food safe) Etronic I - Controls 10m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle Protection Stainless-Steel Jet-Nozzle 25° Water-Supply separation acc. DIN EN 1717 class 4 Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-130bar/3-13MPa	
Max. pressure	150bar/15MPa	
Discharge capacity	300-720l/h	
Nozzle size	045	
Heating capacity	24kW	
Hot water capacity	30-80°C	
Pump speed	1400rpm	
Connected load	28,8kW/44,2A	
Electrical protection	3x50A slow	
Weight net/with package		264kg/281kg
Dimensions device/with package (LxWxH)		122x75,5x162,5cm/125x81,5x175,5cm

Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless-steel), suitable for floor installation, 20mm PU-sound and thermal insulation, thermostatic chassis electric heating 80W, Stainless steel water heater 65l contents with preheating and buffering for immediate hot water use and hot water preparation in stand-by mode, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic I - controls: (start-stop system with switch-off delay, total-switch-off after 20min, OPH-counter with service information, optical flame monitoring with photoelectric cell and fault indicator-light) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, integrated diesel-tank 60l, separate space for 2 x 20l cleaning detergent-container c/w Remote activation, 2 different operating control level, 3 robust on-off rotary switches for H.P. Pump, heating and detergent, 7,5m connection cable.

Art.No. 531