
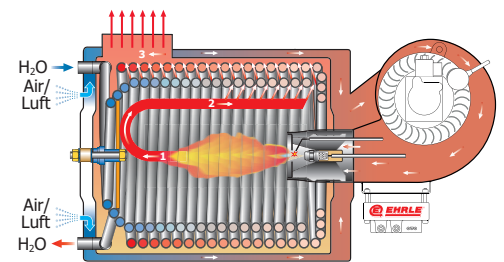


# High Pressure Cleaner

## HD523 UK

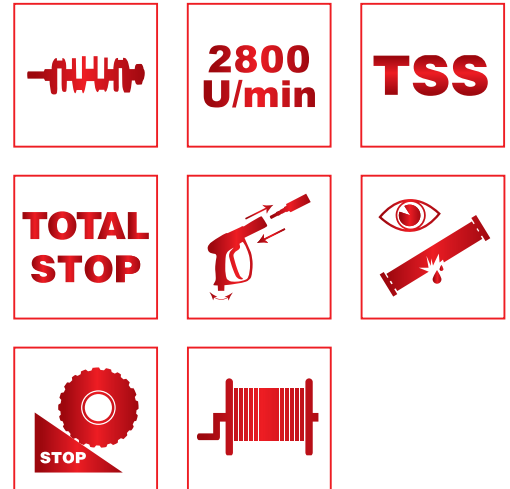

Type		HD523 UK-Standard
Voltage	1/N/PE/AC/50Hz/240V	<ul style="list-style-type: none"> <li>Etronic I - Controls</li> <li>15m HP-Hose DN08 - 315bar</li> <li>Trigger-Gun with swivel</li> <li>Spray-Lance 900mm c/w Vario-Nozzle</li> <li>Stainless-Steel Jet-Nozzle 25°</li> <li>Chemical supply with ND-Injector (optional)</li> <li>Spray-Lance 900mm with Control-Nozzle (optional)</li> </ul>
Operating pressure	30-120bar/3-12MPa	
Max. pressure	140bar/14MPa	
Discharge capacity	300-600l/h	
Nozzle size	045	
Hot water capacity	30-98°C	
Pump speed	2800rpm	
Connected load	2,4kW/12,0A	
Electrical protection	13A slow	
Weight net/with package		
Dimensions device/with package (LxWxH)		107x73,5x102cm/119x88x96cm

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, high performance stainless steel piston, stainless-steel valves, leakage-return, Etronic I - controls: (Start-stop system with switch-off delay, total-switch-off after 20min) 2 motors system (independent of the direction of rotation) separately for H.P.-Pump and heating, unloader safety-valve c/w infinitely variable pressure and quantity regulation, 2 large rubber wheels for rough terrain, with a patented wheel brake and swivel-caster, storage possibility for all accessories, integrated diesel-tank 22l, robust rotary on-off switch, 8m connection cable, removable ergonomic drawbar, Hose-reel for H.P. Hose and cord-reel for electric cord.

Art.No.	413002
---------	--------