
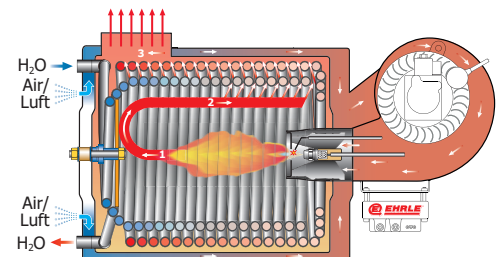


High Pressure Cleaner

HD823 UK

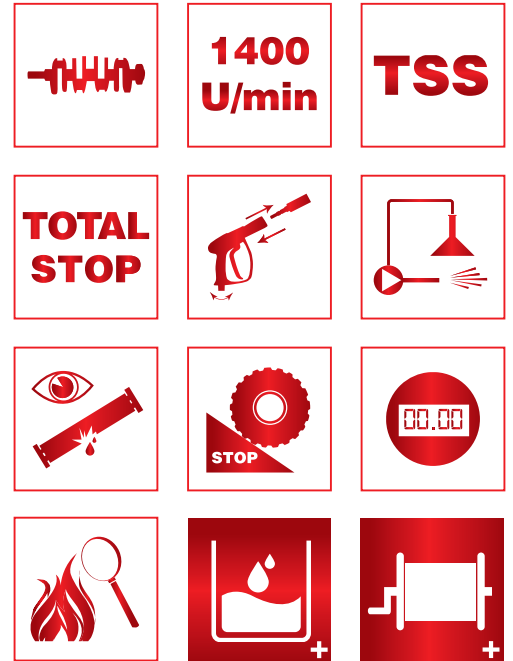

| Type | HD823-Standard | | HD823-Premium |
|--|---------------------|---|---|
| Voltage | 1/N/PE/AC/50Hz/240V | <ul style="list-style-type: none"> Etronic II - Controls 10m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Water-Supply separation acc. water reg. Chemical supply in high-pressure Jet c/w Metering-valve | <ul style="list-style-type: none"> Etronic II - Controls Hose-Reel 20m HP-Hose DN08 - 315bar Trigger-Gun with swivel Spray-Lance 900mm c/w Nozzle-Protection Stainless-Steel Jet-Nozzle 25° Spray-Lance 900mm c/w Rotary-Nozzle Water-Supply separation acc. water reg. Chemical supply in high-pressure Jet c/w Metering-valve |
| Operating pressure | 30-120bar/3-12MPa | | |
| Max. pressure | 140bar/14MPa | | |
| Discharge capacity | 300-720l/h | | |
| Nozzle size | 050 | | |
| Hot water capacity | 30-98°C (150°C) | | |
| Pump speed | 1400rpm | | |
| Connected load | 3,3kW/13A | | |
| Electrical protection | 13A slow | | |
| Weight net/with package | | 158kg/186kg | 167kg/195kg |
| Dimensions device/with package (LxWxH) | | 107x73,5x102cm/119x88x127cm | 107x73,5x102cm/119x88x127cm |

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of ABS, triplex-piston pump with brass pump head, nickel plated, high-performance ceramic piston, stainless-steel valves, leakage-return, Etronic II - controls: (Start-stop system with switch-off delay, total-switch-off after 20min OPH-counter with service information, low-water cut-off, low-fuel cut-off, optical flame monitoring with photoelectric cell and fault indicator-light, steam-stage) 2 motors system (independent of the direction of rotation) separately for H.P.Pump and heating, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, 4 large rubber wheels for rough terrain, with a patented wheel brake 2-way, storage possibility for all accessories, integrated diesel-tank 25l, integrated detergent-tank 20l, robust rotary on-off switch, 7,5m connection cable, removable ergonomic drawbar.

| | | |
|---------|--------|--------|
| Art.No. | 496003 | 496004 |
|---------|--------|--------|