

SERIES KSM

KSM4540

High Pressure Cleaner | Cold water | Stationary



More information via the QR code.



Voltage: AC 400V




Operating pressure: 30-180bar



Discharge capacity: 900-4500l/h



Our KSM series appliances are **resistant to hot water** up to 80°C

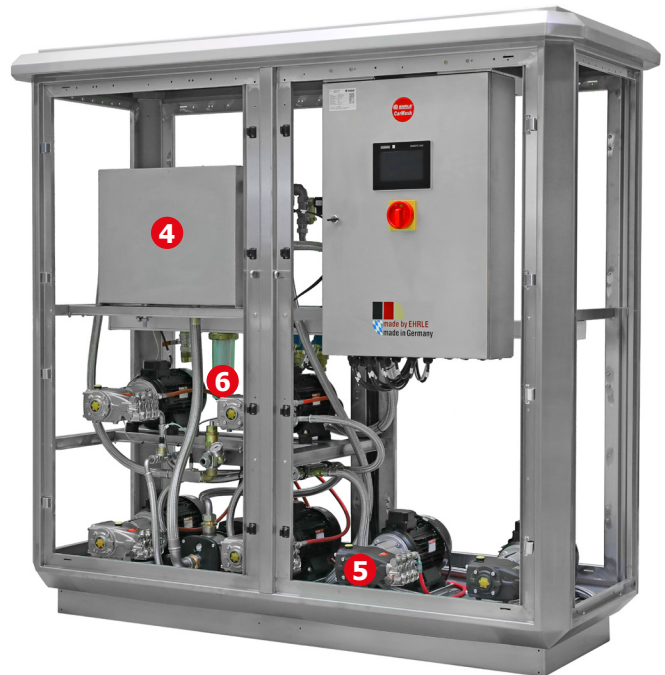

KSM4540

Art. No. 1564

- 1 Condition Monitoring:**
 - Monitoring and control of the high-pressure pump
 - 7" Touch-Screen Monitor
 - System overview with pressure display
- 2 On/off rotary switch**
- 3 Housing:**
 - Device-chassis made from galvanized steel and powder-coated
 - Device-chassis made out of stainless-steel (Food-Safe)
- 4 60l Water-Storage tank**
- 5 Motor-Pump unit:**
 - 3 bearings
 - Triplex-Piston pump
 - High-Performance ceramic piston
 - Stainless-Steel valves
 - Chrome-Nickel pump head
 - Up to 6 high-pressure pumps in one device
 - PLC controlled
- 6 Water inlet filter**

