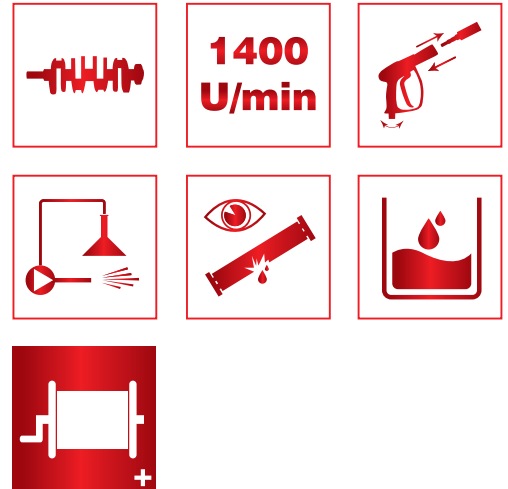


High Pressure Cleaner

HDB1540


Type		HDB1540-Standard	HDB1540-Premium
Engine	Gasoline	10m HP-Hose DN08 - 315bar - Trigger-Gun with swivel - Spray-Lance 900mm c/w Nozzle-Protection - Stainless-Steel Jet-Nozzle 25° - Water-Supply separation acc. water reg. - Chemical supply in high-pressure Jet c/w Metering-valve	- Hose-Reel 20m HP-Hose DN08 - 315bar - Trigger-Gun with swivel - Spray-Lance 900mm c/w Nozzle-Protection - Stainless-Steel Jet-Nozzle 25° - Spray-Lance 900mm c/w Rotary-Nozzle - Water-Supply separation acc. DIN EN 1717 class 4 - Chemical supply in high-pressure Jet c/w Metering-valve
Operating pressure	30-280bar/3-28MPa		
Max. pressure	300bar/30MPa		
Discharge capacity	300-1000l/h		
Nozzle size	035		
Max. Inlet temperature	30-98°C		
Pump speed	1400rpm		
Connected load	18h.p. B&S	206kg/234kg	215kg/243kg
Electric-Starter	Option		
Weight net/with package		120x80x80cm/121x81x96cm	120x80x80cm/121x81x135cm
Dimensions device/with package (LxWxH)			

Robust, corrosion-resistant, self-supporting device chassis, impact-resistant device-cover made of steel galvanized and powder-coated, triplex-piston pump with brass pump head, high-performance ceramic piston, stainless-steel valves, leakage-return, gearbox for reducing the high-pressure pump speed, separately driven burner motor for heating, 4-fold safety system, consisting of pressure-switch, unloader safety-valve c/w Infinitely variable pressure and quantity regulation, safety-valve and thermostat, automatic load-idle speed control, 4 large rubber-pneumatic tires for rough terrain, storage possibility for all accessories, removable standard diesel-canister 20l, external 2-way detergent supply, removable ergonomic drawbar.

Art.No.	164001	164002
Art.No. device with electric-starter	165001	165002