


# High Pressure Cleaner

## KSM4540

Hot water resistant

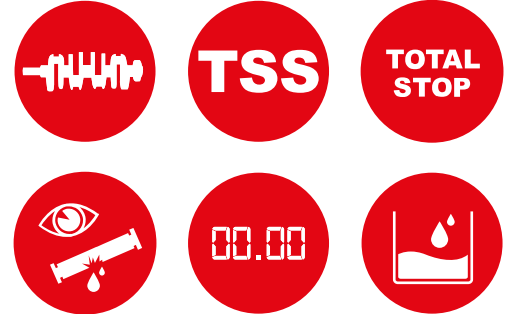

Type	KSM4540		KSM4540-INOX
Voltage	3/N/PE/AC/50Hz/400V	<ul style="list-style-type: none"> <li>7" Touch-Screen Monitor</li> <li>PLC Controls Siemens S7-1200</li> <li>Automatic Switch On and Off Control for high-pressure pumps</li> <li>Automatic Stand-By Operation</li> <li>Pressureless pipes in Stand-By</li> <li>Booster-Supply-Pump</li> <li>60l Water-Storage tank</li> <li>Water-Supply separation acc. DIN EN 1717 class 4</li> <li>Maintenance interval display</li> </ul>	<ul style="list-style-type: none"> <li>Stainless Steel (Food-Safe)</li> <li>7" Touch-Screen Monitor</li> <li>PLC Controls Siemens S7-1200</li> <li>Automatic Switch On and Off Control for high-pressure pumps</li> <li>Automatic Stand-By Operation</li> <li>Pressureless pipes in Stand-By</li> <li>Booster-Supply-Pump</li> <li>60l Water-Storage tank</li> <li>Water-Supply separation acc. DIN EN 1717 class 4</li> <li>Maintenance interval display</li> </ul>
Operating pressure	30-180bar/3-18MPa		
Max. pressure	200bar/20MPa		
Discharge capacity	900-4500l/h		
Nozzle size	5x050		
Max. Inlet temperature	80°C		
Pump speed	1400rpm		
Connected load	33,5kW/60,5A		
Electrical protection	3x80A slow		
Weight net/with package		-	-
Dimensions device/with package (LxWxH)		213x80x209cm/ -	213x80x209cm/ -

Self-supporting, robust, device-chassis made from galvanized steel and powder-coated (option INOX: device-chassis made out of stainless- steel), suitable for floor installation, triplex-piston pump with chrome-nickel pump head, hot-water resistant up to 85°C, high-performance ceramic piston, stainless-steel valves, leakage-return, booster-pump for charging the high-pressure pumps (cavitation avoidance), automatic pump-on and shut-off control by plc, total-switch-off between 5 to 600min - adjustable, with leakage-recognition, unloader safety-valve for monitoring, pressureless pipe-system in stand-by mode, robust rotary on-off switch - lockable.

Art.No.	1564	156400
---------	------	--------